


# SLIDING EAVE AT DRIP EDGE

ACCEPTABLE SYSTEMS: NV 1.5" & NV 2" STANDING SEAM

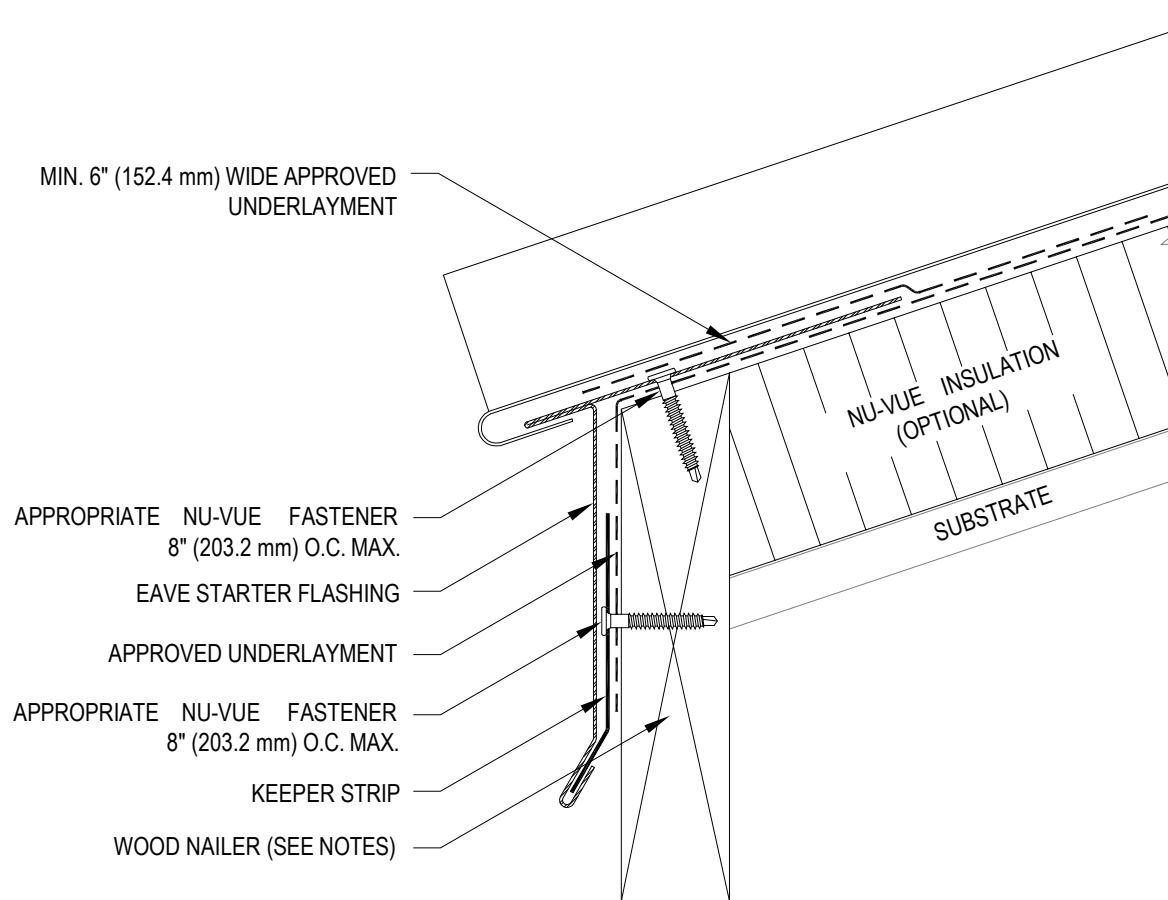

## NOTES:


1. REFER TO NU-VUE WEBSITE FOR MOST CURRENT INFORMATION.
2. REFER TO TECHNICAL INFORMATION SHEETS FOR FASCIA SIZES, ACCESSORIES, AND FINISHES AVAILABLE.
3. WOOD NAILER MUST BE INSTALLED TO MEET APPLICABLE BUILDING CODES OR 200 LBS PER LINEAR FOOT MINIMUM IN ANY GIVEN DIRECTION.
4. REFER TO THE NU-VUE TECHNICAL DATABASE FOR FASTENER COMPATIBILITY WITH METAL.
5. REFER TO THE NU-VUE TECHNICAL DATABASE FOR HEM LENGTH AND REQUIRED DISTANCE BETWEEN THE PANEL AND CLEAT.
6. APPLICATION DETAILS ARE FOR ILLUSTRATION PURPOSES ONLY AND MAY NOT BE APPROPRIATE FOR ALL BUILDING DESIGNS AND CONDITIONS.



Job Name:	
Date:	
Contractor:	
Notes:	

# SLIDING EAVE AT GUTTER

ACCEPTABLE SYSTEMS: NV 1.5" & NV 2", STANDING SEAM

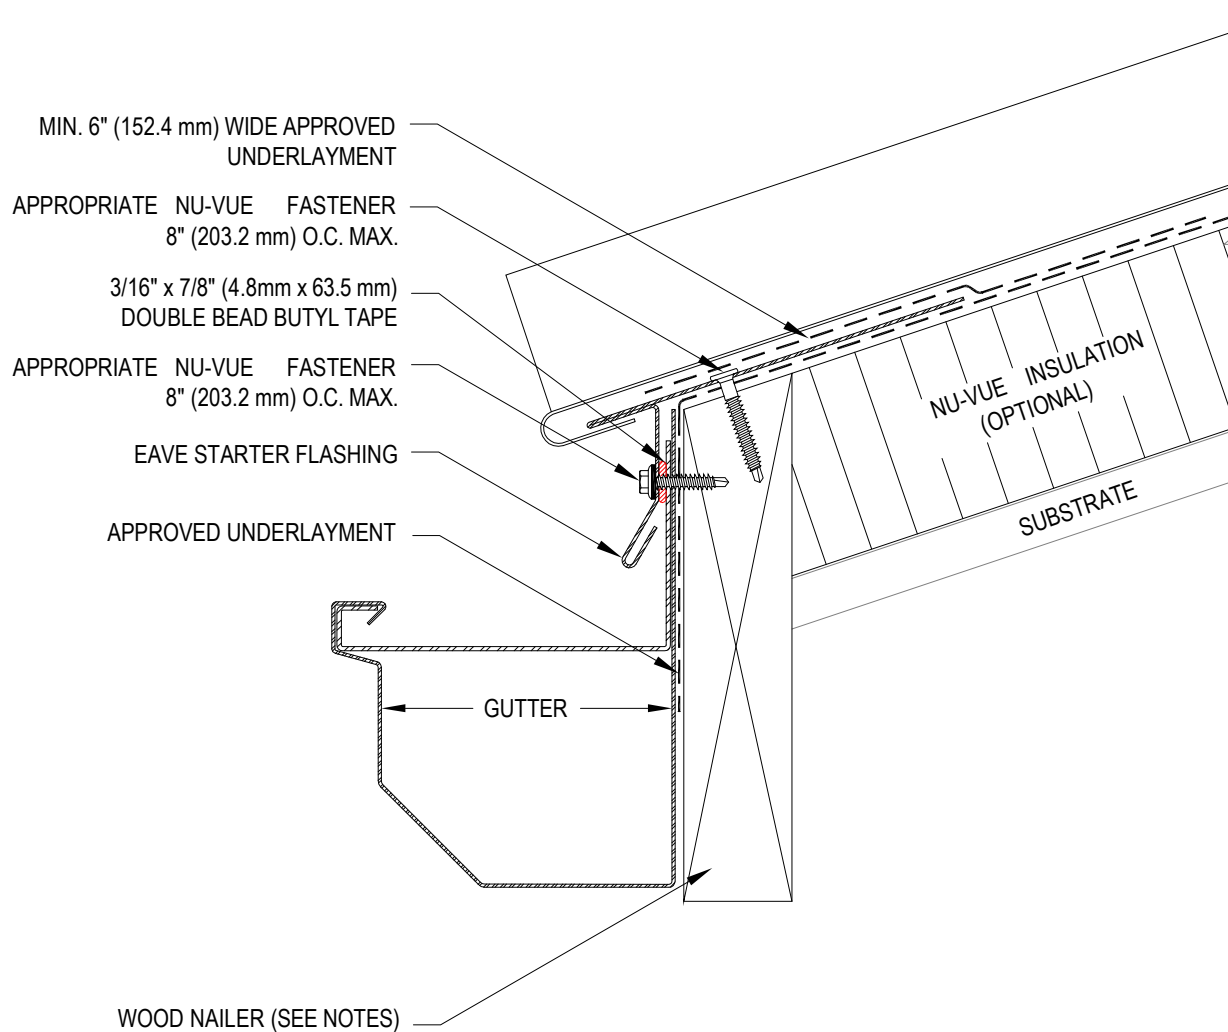

## NOTES:

1. REFER TO NU-VUE WEBSITE FOR MOST CURRENT INFORMATION.
2. REFER TO TECHNICAL INFORMATION SHEETS FOR FASCIA SIZES, ACCESSORIES, AND FINISHES AVAILABLE.
3. WOOD NAILER MUST BE INSTALLED TO MEET APPLICABLE BUILDING CODES OR 200 LBS PER LINEAR FOOT MINIMUM IN ANY GIVEN DIRECTION.
4. REFER TO THE NU-VUE TECHNICAL DATABASE FOR FASTENER COMPATIBILITY WITH METAL.
5. REFER TO THE NU-VUE TECHNICAL DATABASE FOR HEM LENGTH AND REQUIRED DISTANCE BETWEEN THE PANEL AND CLEAT.
6. APPLICATION DETAILS ARE FOR ILLUSTRATION PURPOSES ONLY AND MAY NOT BE APPROPRIATE FOR ALL BUILDING DESIGNS AND CONDITIONS.



Job Name:	
Date:	
Contractor:	Notes:

# CLEATED SLIDING EAVE AT DRIP EDGE

ACCEPTABLE SYSTEMS: NV 1.5" & NV 2" STANDING SEAM

APPROPRIATE NU-VUE FASTENER  
24" (609.6 mm) O.C. MAX.

APPROPRIATE NU-VUE FASTENER  
8" (203.2 mm) O.C. MAX.

CONTINUOUS STARTER STRIP  
SET IN 3/16" x 7/8" BUTYL TAPE


EAVE STARTER FLASHING

APPROVED UNDERLAYMENT

KEEPER STRIP

APPROPRIATE NU-VUE FASTENER  
8" (203.2 mm) O.C. MAX.

WOOD NAILER (SEE NOTES)

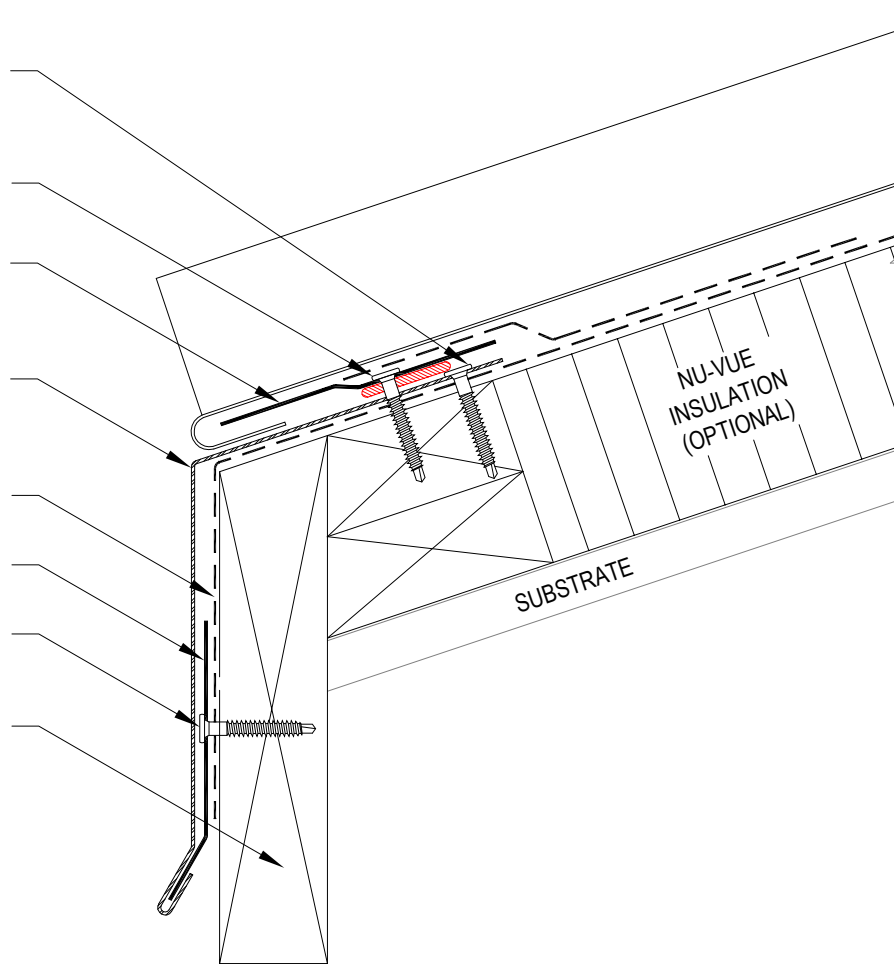

## NOTES:

1. REFER TO NU-VUE WEBSITE FOR MOST CURRENT INFORMATION.
2. REFER TO TECHNICAL INFORMATION SHEETS FOR FASCIA SIZES, ACCESSORIES, AND FINISHES AVAILABLE.
3. WOOD NAILER MUST BE INSTALLED TO MEET APPLICABLE BUILDING CODES OR 200 LBS PER LINEAR FOOT MINIMUM IN ANY GIVEN DIRECTION.
4. REFER TO THE NU-VUE TECHNICAL DATABASE FOR FASTENER COMPATIBILITY WITH METAL.
5. REFER TO THE NU-VUE TECHNICAL DATABASE FOR HEM LENGTH AND REQUIRED DISTANCE BETWEEN THE PANEL AND CLEAT.
6. APPLICATION DETAILS ARE FOR ILLUSTRATION PURPOSES ONLY AND MAY NOT BE APPROPRIATE FOR ALL BUILDING DESIGNS AND CONDITIONS.



Job Name:	
Date:	
Contractor:	
Notes:	

# CLEATED SLIDING EAVE AT GUTTER

ACCEPTABLE SYSTEMS: NV 1.5" & NV 2" STANDING SEAM

APPROPRIATE NU-VUE FASTENER  
24" (609.6 mm) O.C. MAX.


APPROPRIATE NU-VUE FASTENER  
8" (203.2 mm) O.C. MAX.

CONTINUOUS STARTER STRIP  
SET IN 3/16" x 7/8" BUTYL TAPE

APPROVED UNDERLAYMENT

APPROPRIATE NU-VUE FASTENER  
8" (203.2 mm) O.C. MAX.

EAVE STARTER FLASHING; 3/16" x 7/8"  
(4.8mm x 63.5 mm) DOUBLE BEAD  
BUTYL TAPE BETWEEN FLASHING  
AND GUTTER

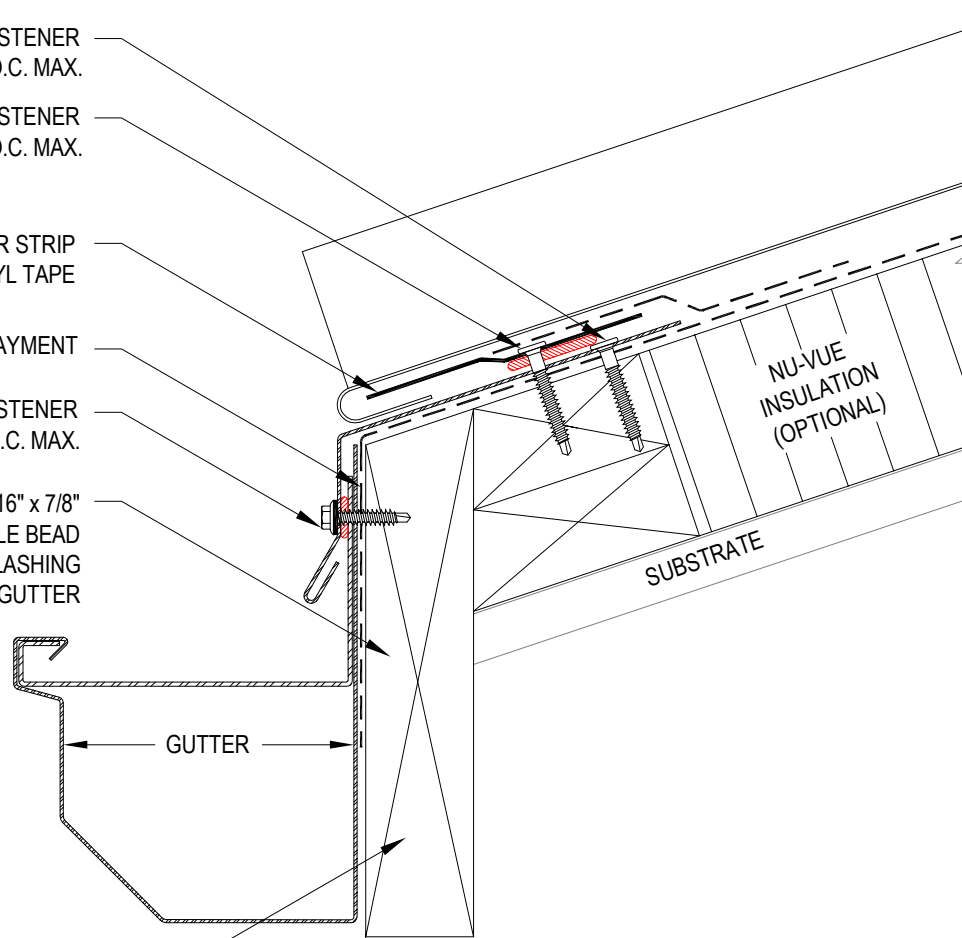

WOOD NAILER (SEE NOTES)

## NOTES:

1. REFER TO NUVUE WEBSITE FOR MOST CURRENT INFORMATION.
2. REFER TO TECHNICAL INFORMATION SHEETS FOR FASCIA SIZES, ACCESSORIES, AND FINISHES AVAILABLE.
3. WOOD NAILER MUST BE INSTALLED TO MEET APPLICABLE BUILDING CODES OR 200 LBS PER LINEAR FOOT MINIMUM IN ANY GIVEN DIRECTION.
4. REFER TO THE NU-VUE TECHNICAL DATABASE FOR FASTENER COMPATIBILITY WITH METAL.
5. REFER TO THE NU-VUE TECHNICAL DATABASE FOR HEM LENGTH AND REQUIRED DISTANCE BETWEEN THE PANEL AND CLEAT.
6. APPLICATION DETAILS ARE FOR ILLUSTRATION PURPOSES ONLY AND MAY NOT BE APPROPRIATE FOR ALL BUILDING DESIGNS AND CONDITIONS.



Job Name:	
Date:	
Contractor:	
Notes:	